

Locking

- innovative automatic closing system with 3 flexible bars
- hinders unauthorised opening = anti-theft
- through the positioning of the locking points the cover is centred in the frame and is frictionally locked

Frame



- articulated frame for problem-free lifting through the smooth outer area

Hinge

- simple ergonomic opening of the cover
- 120° position of inspection, 90° lifting position and blocking against unintentional closing of the cover

Insert

- changeable dampening insert "HYDROprene" / Polychloroprene according to DIN 53505 standard
- long life, high abrasion stability for extreme loads

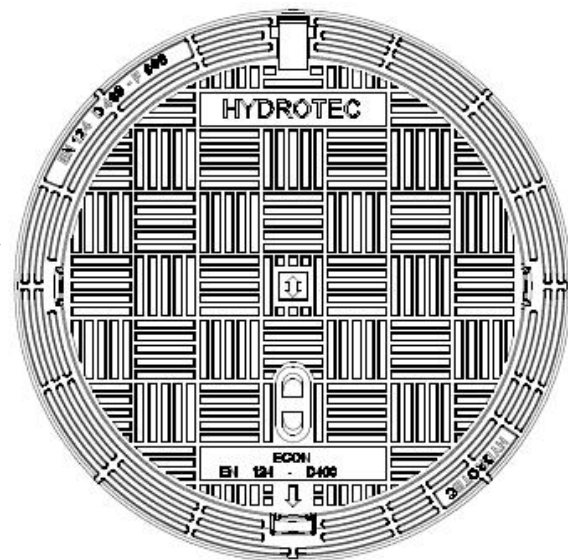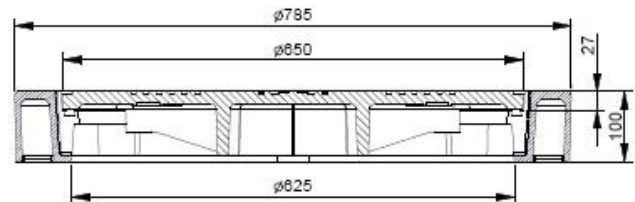

Änderungen vorbehalten! / subject to alterations in measurement and design!