

Cover

- with concrete filling
- close lifting pocket

Frame


- changeable dampening insert

Options

- frame with height 100 or 140

Attention

With the overall height of the frame under 100mm – the installation must be carried out under the observance of EN 124 section 7.16!

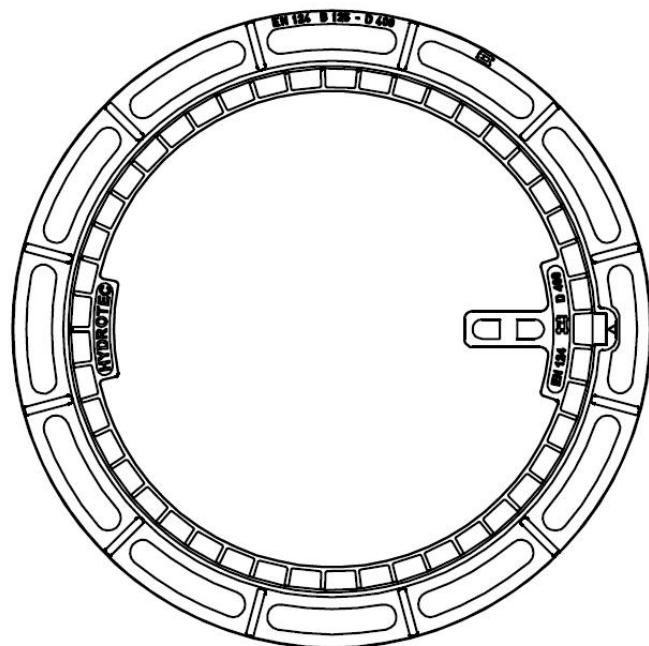

Änderungen vorbehalten! / subject to alterations in measurement and design!